


REVISIONS					
SYM	E.O.'S	DESCRIPTION	DRWN	APP'D	DATE

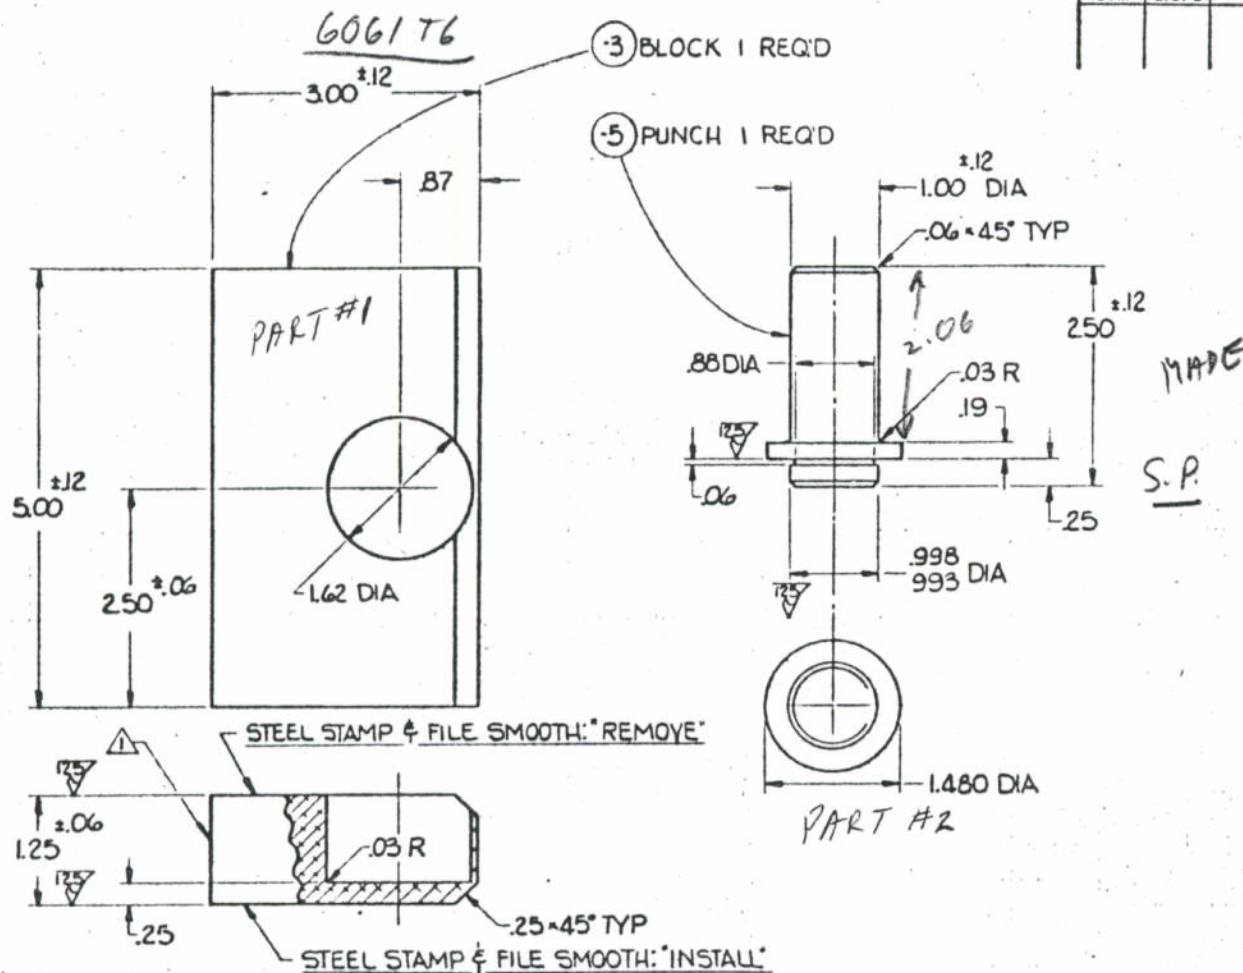

SHOP COPY


S. A.

269A924
KIT

NOTES:

1. IDENTIFY (AS PARTS 1 & 2 OF 2) PER HP 8-5 (IMPRESSION STAMP)
2. ANODIZE -3 PER HP 4-2
3. BLACK OXIDE -5 PER HP 4-50

REDUCED SIZE PRINT

1		-5		1.5 DIA x .25		4130 STL		MIL-S-6758 COND F4	
1		-3		BLOCK		1.25 x .30 x .50		2024-T3 ALUM QQ-A-355	
REQD	PART NO.	REQD	PART NO.	NAME	SIZE	DESCRIPTION	SPECIFICATION		
ASSEMBLY OPP.			ASSEMBLY SHOWN			LIST OF MATERIAL			
				UNLESS OTHERWISE SPECIFIED	DRWN	PUNCH & BLOCK-		HUGHES TOOL COMPANY	
				DIMENSIONAL TOLERANCES	CHK'D	269A5050-44		AIRCRAFT DIVISION	
				3 PLACE DECIMAL ± .010	APP'D	BRG INSTALL		CLIVER CITY, CALIFORNIA	
				2 PLACE DECIMAL ± .03	APP'D				
				ANGULAR ± 0°30'	APP'D			269A9241	
				DIMENSIONS TO BE MET BEFORE PLATING	APP'D			CODE 02731	
				CORNER RADIUS .062 ON C BORES AND SPOT FACES OF 1.250 DIA. OR LESS - .073 RADIUS ON GREATER THAN 1.250 DIA.	APP'D	" #1 & #2 "		SHEET 1 OF	
NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY		APP'D	SCALE FULL			
APPLICATION		QTY REQD							